

Google Earth

Image © 2025 Airbus

County Rd 1500 W

#1 Entranceway

#2 Entranceway

#34 Entranceway

#33 Entranceway

Main Entranceway

#28 Entranceway

#26-27 Entranceway

#22 Entranceway

WALKWAY



B

C

D


F

G

H

A

E

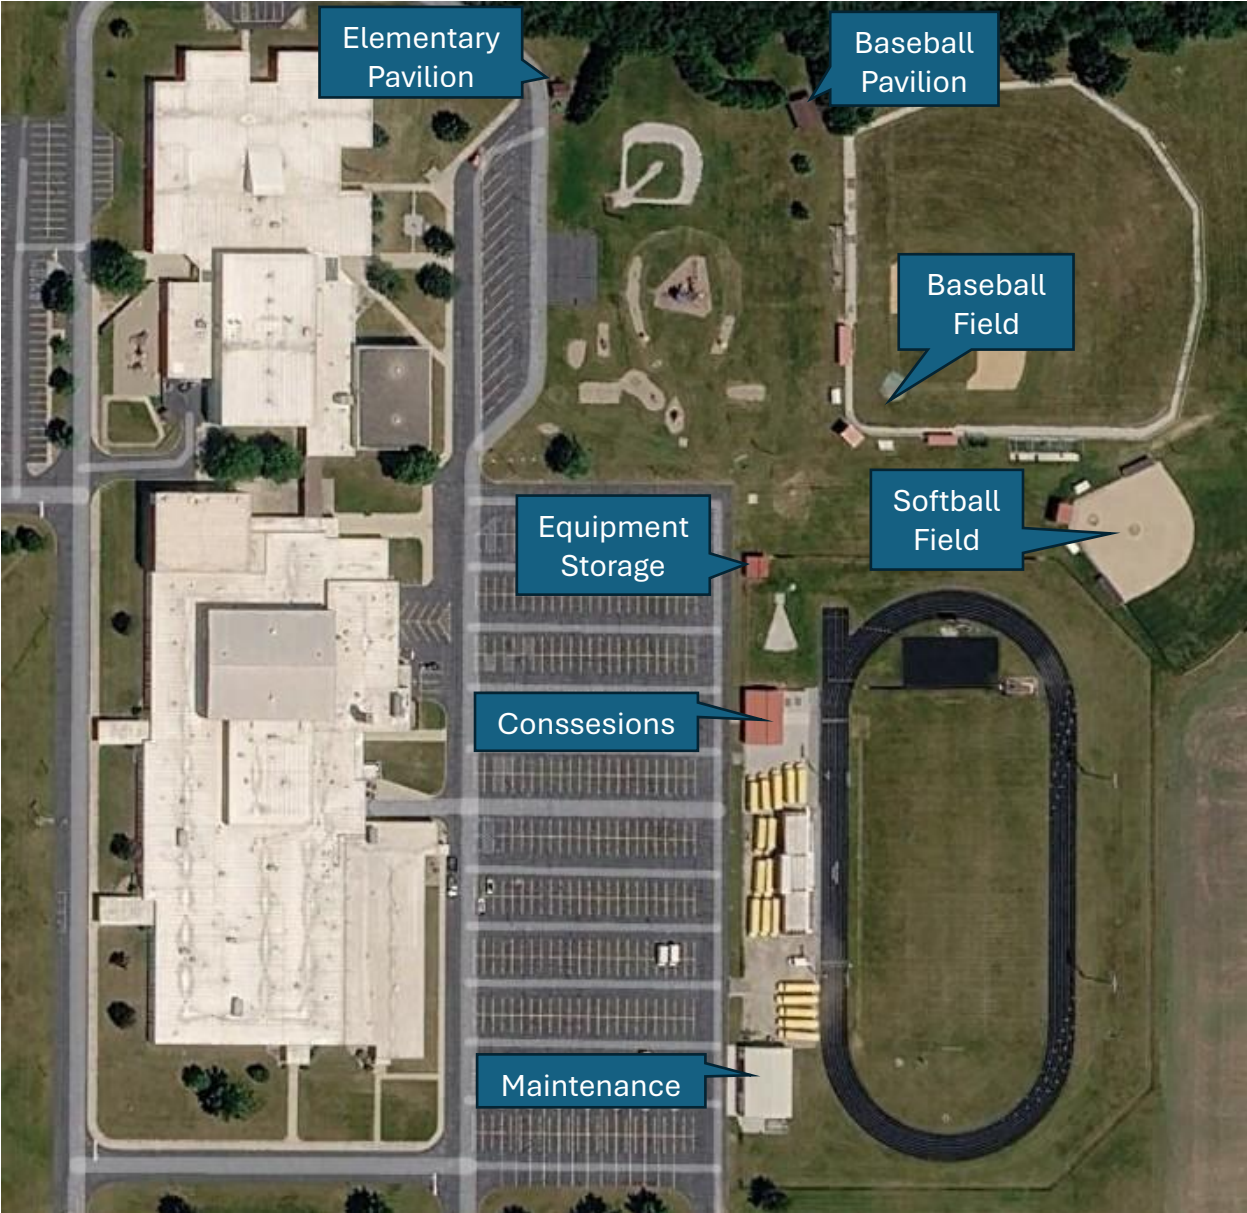

Highschool

Scope of work - For Sections B, C, E, F, G, H, entrances 1, 2, 26-27, 28, 33, and main entrance canopies.

1. Remove existing PVC roofing system down the structural deck.
 - a. Alternate - leave existing insulation in place and replace any wet or damaged.
2. Install new insulation and associated blocking as per code.
 - a. Alternate - install a coverboard over existing insulation.
3. Install new membrane type is like and kind as existing.
4. Remove and replace detailing as existing.
5. Proposal to include but not limited to - Dispose of all debris, permits, mechanical, electrical, etc. for a complete roofing project.

Scope of work - For Sections D, #22 Entrance, and Walkway.

1. Remove standing seam roofing system down the structural deck/support.
2. Install new insulation if required as per code.
3. Install new standing seam roofing system type is like and kind as existing.
4. Remove and replace detailing as existing.
5. Proposal to include but not limited to - Dispose of all debris, permits, mechanical, electrical, etc. for a complete roofing project.

Scope of work - For HVAC Equipment.

1. Remove and install replacement hoods for all power vents and gravity vents.
2. Comb exposed HVAC condenser coil fins.

Elementary School

Scope of work - For HVAC Equipment.

1. Remove and install replacement hoods for all power vents and gravity vents.
2. Comb exposed HVAC condenser coil fins.

Elementary School Pavilion, Baseball dugouts and press box, Softball dugouts and press box, Equipment storage, concessions, and Maintenance.

Scope of work.

1. Remove metal roofing system down the structural deck/support.
2. Install new insulation, if required as per code.
3. Install new metal roofing system type is like and kind as existing.
4. Remove and replace detailing as existing.
5. Proposal to include but not limited to - Dispose of all debris, permits, mechanical, electrical, etc. for a complete roofing project.

Baseball Pavilion

Scope of work.

1. Remove three-tab roofing system down the structural deck/support.
2. Install new three-tab roofing system, type is like and kind as existing.
3. Remove and replace detailing as existing.
4. Proposal to include but not limited to - Dispose of all debris, permits, etc. for a complete roofing project.